



National Standards Authority of Ireland

IRISH STANDARD

**I.S. ETR 077:2002**

ICS 33.070.40

**SATELLITE EARTH STATIONS AND  
SYSTEMS (SES); SPURIOUS RADIATION  
LIMITS TO AND FROM SATELLITE EARTH  
STATIONS, VERY SMALL APERTURE  
TERMINALS (VSATS) AND TELEVISION  
RECEIVE ONLY (TVRO)**

National Standards  
Authority of Ireland  
Dublin 9  
Ireland

Tel: (01) 807 3800  
Tel: (01) 807 3838

*This Irish Standard was  
published under the  
authority of the National  
Standards Authority of  
Ireland  
and comes into effect on:  
August 7, 2002*


**NO COPYING WITHOUT NSAI  
PERMISSION EXCEPT AS  
PERMITTED BY COPYRIGHT  
LAW**

© NSAI 2002

**Price Code M**

Údarás um Chaighdeán Náisiúnta na hÉireann



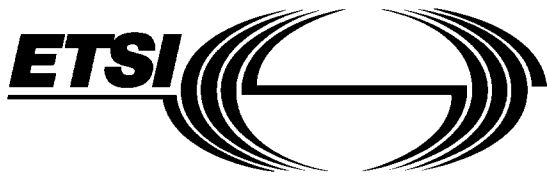

**ETSI**  
**TECHNICAL**  
**REPORT**

**ETR 077**

November 1993

---

Source: ETSI TC-SES

Reference: DTR/SES-02011

ICS: 621.391.827.25

**Key words:** Spurious radiation, VSAT, TVRO

**Satellite Earth Stations (SES);  
Spurious radiation limitations to and from satellite  
earth stations, Very Small Aperture Terminals (VSAT)  
and Television Receive Only (TVRO)**

**ETSI**

European Telecommunications Standards Institute

**ETSI Secretariat**

**Postal address:** F-06921 Sophia Antipolis CEDEX - FRANCE

**Office address:** 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

**X.400:** c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

---

**Copyright Notification:** No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1993. All rights reserved.



## Contents

Foreword .....		5
Introduction .....		5
1 Scope .....		7
2 References .....		7
3 Definitions, abbreviations and units .....		8
3.1 Definitions .....		8
3.2 Other definitions .....		9
3.3 Abbreviations .....		10
3.4 Units for power values .....		10
4 Existing recommendations and reports from the International Telecommunications Union (ITU) and its associated bodies .....		11
5 General considerations .....		11
5.1 Effects of spurious radiation on receiving stations .....		11
5.2 Sources of spurious radiation, physical units and measuring bandwidth .....		13
5.2.1 Sources of spurious radiation .....		13
5.2.2 Physical units .....		13
5.2.3 Exclusion of the main beam direction from interference considerations .....		14
5.3 Considerations on measuring procedures .....		14
5.3.1 EIRP value, Power Flux Density (PFD) or electric field strength .....		14
5.3.2 Measurement at antenna ports .....		15
5.3.3 Measuring bandwidth .....		16
5.3.4 Operating conditions .....		16
6 Interference models .....		16
6.1 Physical relationships and main parameters .....		17
6.1.1 Relevant characteristics of interfered station .....		17
6.1.2 Relevant characteristics of interfering station .....		17
6.1.3 Propagation .....		18
6.2 Statistical interferer model .....		18
6.3 Single interferer model .....		18
7 Evaluation of spurious radiation limits for VSATs (based on the statistical interferer model) .....		19
7.1 Adjustment of the derived limits for VSATs in ETs and in CCIR Recommendation 726 .....		19
7.1.1 Receive-only VSAT in ETS 300 157 and in CCIR Recommendation 726 .....		19
7.1.2 Transmit/receive VSATs in ETS 300 159 and in CCIR Recommendation 726 .....		19
7.2 Spurious radiation assessment studies on transmit/receive VSATs for the carrier on case .....		20
8 Calculation examples for typical cases with a single interfering station for illustration purpose .....		21
8.1 Examples of station parameters .....		22
8.1.1 Receive only VSATs used for data distribution .....		22
8.1.2 Transmit/receive VSATs used for data communication .....		22
8.1.3 Radio relay systems for the transmission of digital signals .....		22
8.2 Interference level at a receiver input caused by one interferer versus the distance .....		23
8.2.1 Interference level at a VSAT receiver input versus distance .....		23
8.2.2 Interference level at a radio relay station receiver input vs. distance .....		24
9 Conflict resolution .....		26

10	Conclusions and aspects for further considerations.....	26
Annex A (informative):	Evaluation of spurious radiation limits for VSATs, based on a statistical interferer model.....	28
A.1	Discussion .....	28
A.1.1	Determination of the level of acceptable interference .....	28
A.1.2	Evaluation of the noise floor of the interfered services .....	28
A.1.3	Values given in CCIR Report 713-1 .....	29
A.1.4	Conclusion.....	30
A.2	Evaluation of the total level of interferences .....	30
A.2.1	Statistical determination of $10 \log(\sum i(Gr(i) / di_{(m)^2}))$ .....	30
A.2.2	Probabilistic computation $10 \log(E(\sum i(Gr(i) / di_{(m)^2})))$ .....	31
A.2.3	Computation of the expected value of the antenna gain $E(Gr)$ .....	32
A.2.4	Computation of the expected value of the $E(1/d^2)$ .....	33
A.2.5	Sources density .....	34
A.2.6	Combination of the parameters.....	34
A.2.7	Maximum Spurious EIRP .....	34
A.3	Recommendation for VSATs and TVROs outside the main beam .....	35
Annex B (informative):	Protection of microwave radio links .....	36
B.1	General.....	36
B.2	Definitions and assumptions.....	36
B.3	Antennas presently used for radio relay systems .....	37
B.4	Critical positions of VSATs relative to a radio relay station .....	38
B.5	Conclusion .....	39
History	.....	40

This is a free preview. Purchase the entire publication at the link below:

[Product Page](#)

- 
- [Looking for additional Standards? Visit Intertek Inform Infostore](#)
  - [Learn about LexConnect, All Jurisdictions, Standards referenced in Australian legislation](#)
-