



National Standards Authority of Ireland

IRISH STANDARD

I.S. ETR 077:2002

ICS 33.070.40

**SATELLITE EARTH STATIONS AND
SYSTEMS (SES); SPURIOUS RADIATION
LIMITS TO AND FROM SATELLITE EARTH
STATIONS, VERY SMALL APERTURE
TERMINALS (VSATS) AND TELEVISION
RECEIVE ONLY (TVRO)**

National Standards
Authority of Ireland
Dublin 9
Ireland

Tel: (01) 807 3800
Tel: (01) 807 3838


*This Irish Standard was
published under the
authority of the National
Standards Authority of
Ireland
and comes into effect on:
August 7, 2002*

**NO COPYING WITHOUT NSAI
PERMISSION EXCEPT AS
PERMITTED BY COPYRIGHT
LAW**

© NSAI 2002

Price Code M

Údarás um Chaighdeán Náisiúnta na hÉireann

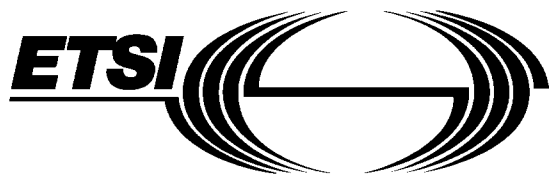

ETSI TECHNICAL REPORT

ETR 077

November 1993

Source: ETSI TC-SES

Reference: DTR/SES-02011

ICS: 621.391.827.25

Key words: Spurious radiation, VSAT, TVRO

Satellite Earth Stations (SES); Spurious radiation limitations to and from satellite earth stations, Very Small Aperture Terminals (VSAT) and Television Receive Only (TVRO)

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - **Fax:** +33 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1993. All rights reserved.

Contents

Foreword	5
Introduction	5
1 Scope	7
2 References	7
3 Definitions, abbreviations and units	8
3.1 Definitions	8
3.2 Other definitions	9
3.3 Abbreviations	10
3.4 Units for power values	10
4 Existing recommendations and reports from the International Telecommunications Union (ITU) and its associated bodies	11
5 General considerations	11
5.1 Effects of spurious radiation on receiving stations	11
5.2 Sources of spurious radiation, physical units and measuring bandwidth	13
5.2.1 Sources of spurious radiation	13
5.2.2 Physical units	13
5.2.3 Exclusion of the main beam direction from interference considerations	14
5.3 Considerations on measuring procedures	14
5.3.1 EIRP value, Power Flux Density (PFD) or electric field strength	14
5.3.2 Measurement at antenna ports	15
5.3.3 Measuring bandwidth	16
5.3.4 Operating conditions	16
6 Interference models	16
6.1 Physical relationships and main parameters	17
6.1.1 Relevant characteristics of interfered station	17
6.1.2 Relevant characteristics of interfering station	17
6.1.3 Propagation	18
6.2 Statistical interferer model	18
6.3 Single interferer model	18
7 Evaluation of spurious radiation limits for VSATs (based on the statistical interferer model)	19
7.1 Adjustment of the derived limits for VSATs in ETs and in CCIR Recommendation 726	19
7.1.1 Receive-only VSAT in ETS 300 157 and in CCIR Recommendation 726	19
7.1.2 Transmit/receive VSATs in ETS 300 159 and in CCIR Recommendation 726	19
7.2 Spurious radiation assessment studies on transmit/receive VSATs for the carrier on case	20
8 Calculation examples for typical cases with a single interfering station for illustration purpose	21
8.1 Examples of station parameters	22
8.1.1 Receive only VSATs used for data distribution	22
8.1.2 Transmit/receive VSATs used for data communication	22
8.1.3 Radio relay systems for the transmission of digital signals	22
8.2 Interference level at a receiver input caused by one interferer versus the distance	23
8.2.1 Interference level at a VSAT receiver input versus distance	23
8.2.2 Interference level at a radio relay station receiver input vs. distance	24
9 Conflict resolution	26

10	Conclusions and aspects for further considerations.....	26
Annex A (informative):	Evaluation of spurious radiation limits for VSATs, based on a statistical interferer model.....	28
A.1	Discussion	28
A.1.1	Determination of the level of acceptable interference	28
A.1.2	Evaluation of the noise floor of the interfered services	28
A.1.3	Values given in CCIR Report 713-1	29
A.1.4	Conclusion.....	30
A.2	Evaluation of the total level of interferences	30
A.2.1	Statistical determination of $10 \log(\sum i(Gr(i) / d_{(m)}^2))$	30
A.2.2	Probabilistic computation $10 \log(E(\sum i(Gr(i) / d_{(m)}^2)))$	31
A.2.3	Computation of the expected value of the antenna gain $E(Gr)$	32
A.2.4	Computation of the expected value of the $E(1/d^2)$	33
A.2.5	Sources density	34
A.2.6	Combination of the parameters.....	34
A.2.7	Maximum Spurious EIRP	34
A.3	Recommendation for VSATs and TVROs outside the main beam	35
Annex B (informative):	Protection of microwave radio links	36
B.1	General	36
B.2	Definitions and assumptions.....	36
B.3	Antennas presently used for radio relay systems	37
B.4	Critical positions of VSATs relative to a radio relay station	38
B.5	Conclusion	39
History		40

This is a free preview. Purchase the entire publication at the link below:

[Product Page](#)

-
- Looking for additional Standards? Visit Intertek Inform Infostore
 - Learn about LexConnect, All Jurisdictions, Standards referenced in Australian legislation
-