



**NSAI**  
Standards

Irish Standard  
I.S. EN 50411-2-5:2009

Fibre organisers and closures to be used in optical fibre communication systems - Product specifications --  
Part 2-5: Sealed closures for air blown fibre microduct, type 1, for category S & A

## I.S. EN 50411-2-5:2009

*Incorporating amendments/corrigenda issued since publication:*

<i>This document replaces:</i>	<i>This document is based on:</i> EN 50411-2-5:2009	<i>Published:</i> 20 May, 2009
This document was published under the authority of the NSAI and comes into effect on: 27 August, 2009		ICS number: 33.180.20
<b>NSAI</b> 1 Swift Square, Northwood, Santry Dublin 9	T +353 1 807 3800 F +353 1 807 3838 E standards@nsai.ie W <b>NSAI.ie</b>	<b>Sales:</b> T +353 1 857 6730 F +353 1 857 6729 W standards.ie
<b>Price Code:</b> <b>N</b>		
Údarás um Chaighdeáin Náisiúnta na hÉireann		

EUROPEAN STANDARD  
NORME EUROPÉENNE  
EUROPÄISCHE NORM

**EN 50411-2-5**

May 2009

ICS 33.180.20

English version

**Fibre organisers and closures to be used  
in optical fibre communication systems -  
Product specifications -  
Part 2-5: Sealed closures for air blown fibre microduct,  
type 1, for category S & A**

Organiseurs et boîtiers de fibres à utiliser  
dans les systèmes de communication  
par fibres optiques -  
Spécifications de produits -  
Partie 2-5: Boîtiers scellés  
pour microconduits de fibres soufflées  
à l'air comprimé, pour les catégories S & A

LWL-Spleißkassetten und -Muffen  
für die Anwendung in LWL-  
Kommunikationssystemen -  
Produktnormen -  
Teil 2-5: Abgedichtete LWL-Muffen  
für ABF-Mikrorohre, Bauart 1,  
für die Kategorien S und A

This European Standard was approved by CENELEC on 2008-12-01. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the Central Secretariat has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Cyprus, the Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

# CENELEC

European Committee for Electrotechnical Standardization  
Comité Européen de Normalisation Electrotechnique  
Europäisches Komitee für Elektrotechnische Normung

**Central Secretariat: Avenue Marnix 17, B - 1000 Brussels**



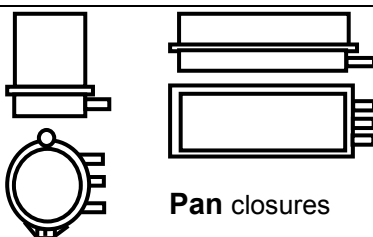

## Foreword

This European Standard was prepared by the Technical Committee CENELEC TC 86BXA, Fibre optic interconnect, passive and connectorised components.

The text of the draft was submitted to the formal vote and was approved by CENELEC as EN 50411-2-5 on 2008-12-01.

The following dates were fixed:

- latest date by which the EN has to be implemented  
at national level by publication of an identical  
national standard or by endorsement (dop) 2009-12-01
  - latest date by which the national standards conflicting  
with the EN have to be withdrawn (dow) 2011-12-01
-

Fibre organisers and closures to be used in optical fibre communication systems – Product specifications							
Sealed closures for air blown fibre microduct, type 1, for category S & A							
<b>Description</b>		<b>Performance</b>					
<b>Construction:</b>	Multiple ported closure	<b>Applications:</b>					
<b>Cable management:</b>	Microduct , protected microduct, ducts and/or sub-ducts.	Blown optical fibre cable networks:					
<b>Cable seals:</b>	Heat activated and or cold applied	for underground:	EN 61753-1 Category S				
		for aerial:	EN 61753-1 Category A				
<b>Related documents:</b>							
EN 60793-2-50	Optical fibres – Part 2-50: Product specifications – Sectional specification for class B single-mode fibres (IEC 60793-2-50)						
EN 60794-5	Optical fibre cables – Part 5: Sectional specification – Microduct cabling for installation by blowing (IEC 60794-5)						
EN 61300 series	Fibre optic interconnecting devices and passive components – Basic test and measurement procedures (IEC 61300 series)						
EN 61753-1	Fibre optic interconnecting devices and passive components performance standard – Part 1: General and guidance for performance standards (IEC 61753-1)						
EN 61756-1	Fibre optic interconnecting devices and passive components – Interface standard for fibre management systems – Part 1: General and guidance (IEC 61756-1)						
EN 61758-1	Fibre optic interconnecting devices and passive components – Interface standard for closures – Part 1: General and guidance (IEC 61758-1)						
ETSI EN 300 019 series	Environmental Engineering (EE) – Environmental conditions and environmental tests for telecommunications equipment						
<b>Construction:</b>		<b>Duct and cable port entries and dimensions (Direct burial or jointing pit mounted)</b>					
 <b>Inline closures</b>		<b>Closure</b>		<b>Max sizes of protected microduct cables mm</b>	<b>Closure designs (Type and/or sub-group)</b>	<b>Maximum physical dimensions in mm Length L Width W Depth D</b>	
 <b>Tee closures</b>		Central split access	<b>Inline (multiple ports)</b>	112	Type 1a	975 x 394 x 330	
				35	Type 2a	648 x 274 x 152	
				26	Type 2b	828 x 274 x 401	
			<b>Tee (single and double port)</b>	32	Single port ends	300 x 200 x 100	
				50	Double port ends	720 x 435 x 210	
 <b>Pan closures</b>		Single end entry	<b>Pan (circular or rectangular)</b>	30	Rectangular	710 x 515 x 148	
				Circular	450 x 350 x 700		
				40	Elliptical	520 x 450 x 300	
 <b>Dome closures</b>	<b>Dome (single end entry)</b>		19	Type 1a	600 x 185 x 265		
			26	Type 1b	750 x 270 x 310		
			35	Type 1c	1 050 x 275 x 310		

## Contents

<b>1</b>	<b>Scope .....</b>	<b>7</b>
1.1	Product definition .....	7
1.2	Operating environment .....	7
1.3	Reliability.....	7
1.4	Quality assurance .....	7
1.5	Allowed fibre and cable types .....	7
1.6	Allowed microduct connector types .....	7
1.7	Microduct storage constraints.....	7
<b>2</b>	<b>Normative references .....</b>	<b>8</b>
<b>3</b>	<b>Definitions and abbreviations.....</b>	<b>9</b>
3.1	Definitions .....	9
3.2	Abbreviations .....	11
<b>4</b>	<b>Description .....</b>	<b>11</b>
4.1	Microduct closure.....	11
4.2	Closure housing functions .....	11
4.3	Burst pressure .....	11
4.4	Closure housing configurations .....	12
4.5	Entry seals .....	13
4.6	Common base configurations .....	13
4.7	Microduct management system.....	13
4.8	Materials .....	14
4.9	Colour and marking .....	14
4.10	Microduct connectors applications and capacity .....	14
<b>5</b>	<b>Variants .....</b>	<b>15</b>
<b>6</b>	<b>Dimensional requirements .....</b>	<b>18</b>
6.1	Dimensions of inline closures .....	18
6.2	Dimensions of tee closures.....	19
6.3	Dimensions of pan closures.....	20
6.4	Dimensions of dome closures.....	21
<b>7</b>	<b>Tests.....</b>	<b>22</b>
7.1	Sample size .....	22
7.2	Test sample preparation .....	22
7.3	Test and measurement methods .....	23
7.4	Test sequence .....	23
7.5	Pass/fail criteria .....	23
<b>8</b>	<b>Test report .....</b>	<b>24</b>
<b>9</b>	<b>Performance requirements .....</b>	<b>24</b>
9.1	Dimensional and marking requirements .....	24
9.2	Sealing, optical and appearance performance criteria .....	25
9.3	Mechanical sealing performance requirements.....	26
9.4	Environmental sealing performance requirements .....	30
9.5	Mechanical optical performance requirements.....	32
9.6	Environmental optical performance requirements .....	33
<b>Annex A</b>	<b>(informative) Fibre for test sample details .....</b>	<b>34</b>
<b>Annex B</b>	<b>(informative) Sample size and product sourcing requirements .....</b>	<b>35</b>
<b>Annex C</b>	<b>(informative) Closure minimum internal diameters, containing microduct connectors .....</b>	<b>36</b>

<b>Annex D (informative) Typical buried blown fibre microduct cable outside diameters .....</b>	<b>41</b>
<b>Annex E (informative) Microduct connector definitions and sketches .....</b>	<b>42</b>
<b>Annex F (informative) Microduct minimum bend radius.....</b>	<b>45</b>
<b>Bibliography .....</b>	<b>46</b>

## Figures

Figure 1 – Schematic – Minimum microduct and connector space profile (see Annex C).....	11
Figure 2 – Inline – Double port ended (I).....	12
Figure 3 – ‘Tee’ – Single entry port ends with a single port at an acute angle.....	12
Figure 4 – ‘Tee’ – Double entry port ends with single or double ports at an acute angle .....	12
Figure 5 – Pan – Entry ports in one position at 90° to the circular cover removal axis.....	12
Figure 6 – Pan – Entry ports in one position at 90° to the rectangular cover removal axis .....	12
Figure 7 – Dome – Single end entry ported closure .....	13
Figure 8 – Diagram showing inline – Closures dimensions – Type 1 configuration.....	18
Figure 9 – Diagram showing inline – Closures dimensions – Type 2a and 2b configurations .....	18
Figure 10 – Diagram showing tee – Closures dimensions showing single ports .....	19
Figure 11 – Diagram showing tee – Closures dimensions showing double ports.....	19
Figure 12 – Diagram showing pan – Circular or elliptical closures dimensions .....	20
Figure 13 – Diagram showing pan – Rectangular closures dimensions .....	20
Figure 14 – Diagram showing dome – Circular and elliptical closures dimensions .....	21
Figure 15 – Track joint configuration sample.....	22
Figure 16 – Spur joint configuration sample .....	23
Figure 17 – Distribution joint configuration sample .....	23
Figure C.1 – Schematic – Minimum microduct and connector space profile .....	36
Figure E.1 – Straight microduct connectors .....	42
Figure E.2 – Straight bulkhead microduct connectors.....	42
Figure E.3 – ID/OD/ID and OD reducer/enlarger stem microduct connectors .....	42
Figure E.4 – ‘ID/OD/ID and OD reducer/enlarger’ microduct connectors .....	43
Figure E.5 – Close down microduct connectors.....	43
Figure E.6 – Liquid block microduct connectors.....	43
Figure E.7 – Liquid block with a barb end .....	43
Figure E.8 – End stop microduct connectors .....	44

**Tables**

Table 1 – Variants for sealed closures for ABF protected microduct, for category S & A.....	15
Table 2 – Line closure capacity – Protected microduct cable selection – Maximum .....	16
Table 3 – Tee closure capacity – Protected microduct cable selection – Maximum.....	16
Table 4 – Pan closure capacity – Protected microduct cable selection – Maximum .....	17
Table 5 – Closure capacity – Protected microduct cable selection – Maximum .....	17
Table 6 – Dimensions of inline closures – Type 1, 2a and 2b configurations .....	18
Table 7 – Dimensions of tee closures .....	19
Table 8 – Dimensions of pan closures .....	20
Table 9 – Dimensions of dome closures .....	21
Table 10 – Tightness, optical and appearance performance criteria .....	25
Table 11 – Mechanical performance requirements .....	26
Table 12 – Environmental sealing performance requirements.....	30
Table 13 – Mechanical optical performance requirements.....	32
Table 14 – Environmental optical performance requirements.....	33
Table A.1 – Fibre references .....	34
Table B.1 – Minimum sample size requirements .....	35
Table C.1 – Typical ABF closure minimum internal diameters, containing 2 blown fibre microduct connectors.....	37
Table C.2 – Typical ABF closure minimum internal diameters, containing 4 blown fibre microduct connectors.....	37
Table C.3 – Typical ABF closure minimum internal diameters, containing 7 blown fibre microduct connectors.....	38
Table C.4 – Typical ABF closure minimum internal diameters, containing 8 blown fibre microduct connectors.....	38
Table C.5 – Typical ABF closure minimum internal diameters, containing 9 blown fibre microduct connectors.....	39
Table C.6 – Typical ABF closure minimum internal diameters, containing 12 blown fibre microduct connectors.....	39
Table C.7 – Typical ABF closure minimum internal diameters, containing 19 blown fibre microduct connectors.....	40
Table C.8 – Typical ABF closure minimum internal diameters, containing 24 blown fibre microduct connectors.....	40
Table D.1 – Number of microducts per protected microduct – Direct bury .....	41
Table D.2 – Number of microducts per protected microduct – Direct bury reinforced .....	41
Table F.1 – Compilation of company standards, to arrive to an industry standard .....	45



## 1 Scope

### 1.1 Product definition

This specification contains the initial, start of life dimensional, optical, mechanical and environmental performance requirements which a fully installed blown fibre protected microduct closure must meet in order for it to be categorised as an EN standard product.

These products are suitable for installation of and use with microduct fibre units, microduct optical fibre cables, microduct and protected microduct as defined within EN 60794-5.

### 1.2 Operating environment

The tests selected combined with the severities and duration are representative of an outside plant for subterranean and/or aerial environment defined by:

- ETSI EN 300 019 series: Class 8.1: underground locations (without earthquake requirement);
- EN 61753-1: Category S: subterranean environment;  
Category A: aerial environment.

### 1.3 Reliability

Whilst the anticipated service life expectancy of the product in this environment is a minimum of 20 years, compliance with this specification does not guarantee the reliability of the product. This should be predicted using a recognised reliability assessment programme.

### 1.4 Quality assurance

Compliance with this specification does not guarantee the manufacturing consistency of the product. This should be maintained using a recognised quality assurance programme.

### 1.5 Allowed fibre and cable types

This closure standard covers all IEC standard optical fibre microducts, and protected microducts with their various fibre capacities, types and designs. This includes, but is not limited to, optical fibre cable standard EN 60794-5.

This product specification has only considered protected microduct cables containing microducts of same outside diameters. There are other hybrid protected microduct cables with microducts of differing OD's, with too many variants to be included in this PS.

### 1.6 Allowed microduct connector types

This closure standard covers all EN standard microduct connectors, including: straight, reducer/enlarger stem, reducer/enlarger, close down, liquid block, liquid block with barb end, and end stop connectors. This includes, but is not limited to, EN 50411-2-8.

### 1.7 Microduct storage constraints

Microduct excess storage is not required in all air blown fibre closures. Some closure types do not have sufficient internal space to provide storage. The need for microduct storage is provided inside the closure when opened, typically to ensure that there is enough microduct to fulfil the following functions:

- remove the coiled microduct attached to the 'closedown' connectors, to a remote location, close to blowing equipment, in the process uncoiling the microducts to aid blowing;
- provide additional microduct if repeated cut backs for connectors are planned or likely to be fitted throughout the closure life.

The minimum microduct storage bend radius is based on the outside diameter and material selection, typically based on 12 times the outside diameter (below 8 mm) and 20 times above. During fibre blowing the bend radius is typically 20 times the microduct diameter.

This is a free preview. Purchase the entire publication at the link below:

[Product Page](#)

- 
- Looking for additional Standards? Visit Intertek Inform Infostore
  - Learn about LexConnect, All Jurisdictions, Standards referenced in Australian legislation
-