

Irish Standard I.S. EN ISO 12782-5:2012

Soil quality - Parameters for geochemical modelling of leaching and speciation of constituents in soils and materials - Part 5: Extraction of humic substances from aqueous samples (ISO 12782-5:2012)

© NSAI 2012

No copying without NSAI permission except as permitted by copyright law.

| Incorporating amendments/ | corrigenda/National Anne. | xes issued since public | cation: | |
|---|--|---|--------------------------|--|
| The National Standards Authori documents: | ty of Ireland (NSAI) produc | es the following cate | gories of formal | |
| I.S. xxx: Irish Standard – national specification based on the consensus of an expert panel and subject to public consultation. | | | | |
| S.R. xxx: Standard Recomr panel and subject to public cons | mendation - recommendat sultation. | ion based on the cons | ensus of an expert | |
| SWiFT xxx: A rapidly developed recommendatory document based on the consensus of the participants of an NSAI workshop. | | | | |
| This document replaces: | | | | |
| This document is based on: EN ISO 12782-5:2012 | <i>Published:</i> 13 June, 2012 | | | |
| This document was publish under the authority of the N and comes into effect on: 13 June, 2012 | | | ICS number: 13.080.05 | |
| NSAI 1 Swift Square, Northwood, Santry Dublin 9 | T +353 1 807 3800 F +353 1 807 3838 E standards@nsai.ie W NSAI.ie | Sales: T +353 1 857 6730 F +353 1 857 6729 W standards.ie | | |
| Údarás um Chaighdeáin Náisiúnta na hÉireann | | | | |

EUROPEAN STANDARD NORME EUROPÉENNE

EN ISO 12782-5

EUROPÄISCHE NORM

June 2012

ICS 13.080.05

English Version

Soil quality - Parameters for geochemical modelling of leaching and speciation of constituents in soils and materials - Part 5: Extraction of humic substances from aqueous samples (ISO 12782-5:2012)

Qualité du sol - Paramètres pour la modélisation géochimique de la lixiviation et de la spéciation des constituants des sols et des matériaux - Partie 5: Extraction des substances humiques des échantillons aqueux (ISO 12782-5:2012) Bodenbeschaffenheit - Parameter zur geochemischen Modellierung der Elution und Speziation von Bestandteilen in Böden und Materialien - Teil 5: Extraktion von Huminstoffen aus wässrigen Proben (ISO 12782-5:2012)

This European Standard was approved by CEN on 31 May 2012.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION COMITÉ EUROPÉEN DE NORMALISATION EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

EN ISO 12782-5:2012 (E)

| Contents | Page |
|----------|------|
| | |
| Foreword | |

Foreword

This document (EN ISO 12782-5:2012) has been prepared by Technical Committee ISO/TC 190 "Soil quality" in collaboration with Technical Committee CEN/TC 345 "Characterization of soils" the secretariat of which is held by NEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by December 2012, and conflicting national standards shall be withdrawn at the latest by December 2012.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organisations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

Endorsement notice

The text of ISO 12782-5:2012 has been approved by CEN as a EN ISO 12782-5:2012 without any modification.

This is a free page sample. Access the full version online.

I.S. EN ISO 12782-5:2012

This page is intentionally left BLANK.

This is a free page sample. Access the full version online.

I.S. EN ISO 12782-5:2012 INTERNATIONAL STANDARD

ISO 12782-5

First edition 2012-06-01

Soil quality — Parameters for geochemical modelling of leaching and speciation of constituents in soils and materials —

Part 5:

Extraction of humic substances from aqueous samples

Qualité du sol — Paramètres pour la modélisation géochimique de la lixiviation et de la spéciation des constituants des sols et des matériaux —

Partie 5: Extraction des substances humiques des échantillons aqueux



ISO 12782-5:2012(E)



COPYRIGHT PROTECTED DOCUMENT

© ISO 2012

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

ISO 12782-5:2012(E)

| Con | tents | ge |
|------------------------|--|----------|
| Forew | ord | . iv |
| Introd | uction | v |
| 1 | Scope | 1 |
| 2 | Normative references | 1 |
| 3 | Terms and definitions | 1 |
| 4 | Principle | 3 |
| 5 | Apparatus | 3 |
| 6 | Reagents | 3 |
| 7 7.1 7.2 7.3 | Sampling Laboratory sample Test sample Test portion | 4 4 |
| 8 8.1 8.2 | Procedure Preparation of DAX-8 resin Determination of total humic acid (HA), fulvic acid (FA) and hydrophilic organic carbon (Hy) content in aqueous samples | 4 |
| 9 | Eluate treatment and storage | 5 |
| 10 | Analytical determination | 5 |
| 11 | Blank test | 5 |
| 12 12.1 12.2 | Calculation | 6 |
| 13 | Expression of results | 8 |
| 14 | Test report | 8 |
| 15 | Performance characteristics | 8 |
| Annex | A (informative) Schematic representation of the fractionation procedure | 9 |
| Annex | B (informative) Validation of procedure | 11 |
| Annex | C (informative) Conditions regarding centrifugation | 16 |
| Biblio | graphy | 19 |

ISO 12782-5:2012(E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 12782-5 was prepared by Technical Committee ISO/TC 190, Soil quality, Subcommittee SC 7, Soil and site assessment.


ISO 12782 consists of the following parts, under the general title *Soil quality* — *Parameters for geochemical modelling of leaching and speciation of constituents in soils and materials*:

- Part 1: Extraction of amorphous iron oxides and hydroxides with ascorbic acid
- Part 2: Extraction of crystalline iron oxides and hydroxides with dithionite
- Part 3: Extraction of aluminium oxides and hydroxides with ammonium oxalate/oxalic acid
- Part 4: Extraction of humic substances from solid samples
- Part 5: Extraction of humic substances from aqueous samples

Introduction

In addition to leaching procedures for subsequent chemical and ecotoxicological testing of soil and other materials including waste, predictive models are becoming indispensable tools in the environmental risk assessment of these materials. Models are particularly required when the results of laboratory leaching tests are to be translated to specific scenarios in the field, with regard to assessing the risks of both contaminant migration and bioavailability.

In the past few years, geochemical models have been shown to be valuable tools to be combined with the data obtained from characterization leaching standards, such as pH-dependence and percolation tests. These models have the advantage of being based on fundamental thermodynamic parameters that have a general validity. In order to enable extrapolation of laboratory leaching data to the mobility and/or bioavailability of a constituent in a specific field scenario, these models require additional input parameters for specific soil properties (see Figure 1).

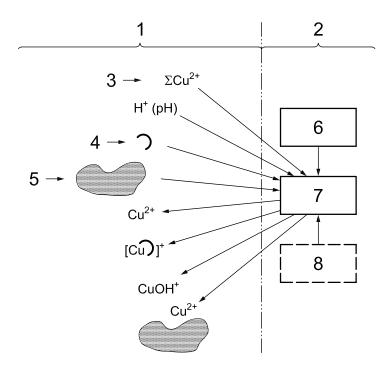

Key

- 1 experiment
- 2 geochemical speciation modelling
- 3 available metal concentration
- 4 dissolved humic substances
- 5 reactive (solid) surfaces
- 6 database with stability constants
- 7 computer program
- 8 assumptions

Figure 1 — Relationships between experimental data, as obtained from laboratory leaching/extraction tests, and geochemical modelling of the speciation of a heavy metal in the environment (modified after M. Gfeller & R. Schulin, ETH, Zürich)

Characterization leaching standards provide information on the concentrations of the contaminant of interest as a function of, in particular, pH and liquid/solid (L/S) ratio. In addition, a more complete analysis of the leachates also provides information on the major ion composition and dissolved organic carbon (DOC), parameters that are particularly important for the chemical speciation of constituents through processes such as precipitation, complexation and competition for adsorption on reactive mineral and organic surfaces in the soil. As illustrated

ISO 12782-5:2012(E)

in Figure 1, for the example of copper, geochemical modelling enables calculation of the metal distribution among these different chemical species in the system of interest. This provides necessary information for risk-assessment purposes, as these different chemical forms play distinct roles in the mobility and bioavailability of the metal in the soil. In addition to information obtained from the leaching standards (in their current state of development/definition), two additional types of information are required.

- a) The "available" (sometimes also referred to as "active" or "exchangeable") concentration of the constituent in the solid phase, as opposed to the total concentration determined by acid destruction of the solid matrix. This "available" concentration can be obtained by leaching at low pH, a condition that can be obtained by extending the pH range in the pH-dependent leaching test (ISO/TS 21268-4) down to pH ≈ 0,5 to pH ≈ 1.
- b) The concentration of reactive organic and mineral surfaces in the soil, which constitute the major binding (adsorption) sites for most constituents in the soil matrix.

The major reactive surfaces that control the binding of constituents by sorption processes to the soil matrix are particulate organic matter and iron and aluminium (hydr)oxides. It is generally accepted that the reactivity of these mineral and organic surfaces can strongly vary as a function of their specific surface area/crystallinity [iron and aluminium (hydr)oxides] and composition (organic matter). When the results are intended to be used for the above-described purposes of geochemical modelling in conjunction with leaching tests, it is important that the methods be selective for reactive surfaces for which generic thermodynamic adsorption parameters are also available for the most important major and trace elements.

These reactive surfaces have been identified in soils, as well as in a variety of other materials for which the leaching of constituents is of relevance. It has been shown that the binding properties of these surfaces play a generic role in the speciation and leaching of constituents among these different materials. As an example, a similar geochemical modelling approach, using model input from the partial or complete ISO 12782 series, has been successfully applied to different soils^[4], amended soils^{[5][6]}, municipal incinerator bottom ash^[7], steel slag^{[8][9]}, bauxite residues^[10], and recycled concrete aggregate^[11]. Hence, the scope of the ISO 12782 series extends from soils to materials including soil amendments and waste materials.

This part of ISO 12782 aims to determine important reactive organic surfaces in soil and materials, for which generic thermodynamic adsorption parameters exist, i.e., humic and fulvic acids. The procedure is based on Reference [12], while generic thermodynamic adsorption parameters for humic and fulvic acids are available in References [13] and [14].

Thermodynamic parameters for adsorption models other than those used in References [13] and [14] are also available in the literature and may also be used to model the binding of constituents to humic and fulvic acids.

The method^[15] is based on a conventional isolation and purification method^[12] that is also used by the International Humic Substances Society (IHSS).

Soil quality — Parameters for geochemical modelling of leaching and speciation of constituents in soils and materials —

Part 5:

Extraction of humic substances from aqueous samples

1 Scope

This part of ISO 12782 specifies a procedure to determine the concentration of humic substances in aqueous samples. These samples may be obtained as such or as eluates from leaching procedures applied to soil or other materials. Other materials also include waste. The content of humic substances can be used as input in geochemical models.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3696, Water for analytical laboratory use — Specification and test methods

ISO 5667-3, Water quality — Sampling — Part 3: Preservation and handling of water samples

ISO 8245, Water quality — Guidelines for the determination of total organic carbon (TOC) and dissolved organic carbon (DOC)

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

dissolved organic carbon

DOC

sum of organically bound carbon present in water originating from compounds (including cyanate and thiocyanate) which will pass a membrane filter of pore size $0.45 \, \mu m$

3.2

humic substance

HS

(partial) decomposition product from plant and animal tissue

NOTE 1 Humic substances form a series of relatively high-molecular-weight, brown-to-black-coloured substances formed by secondary synthesis reactions.

NOTE 2 The term is used as a generic name to describe coloured material or its fractions (e.g. humic and fulvic acids) obtained on the basis of solubility characteristics.

3.3

humic acid

HA

fraction of a humic substance that is not soluble in water under acidic conditions (pH <1 to 2) but is soluble at higher pH values

NOTE Humic acids are dark brown to black in colour.



| The is a new provider i arenade and chare publication at the limit below | This is a free preview. | Purchase the | entire publication | at the link below: |
|--|-------------------------|--------------|--------------------|--------------------|
|--|-------------------------|--------------|--------------------|--------------------|

Product Page

- Dooking for additional Standards? Visit Intertek Inform Infostore
- Dearn about LexConnect, All Jurisdictions, Standards referenced in Australian legislation