



NSAI
Standards

Irish Standard
I.S. EN 50516-3-1:2014

Industrial connector sets and interconnect components to be used in optical fibre control and communication systems -
Product specifications - Part 3-1: Type ODVA APC terminated on EN 60793-2-50 category B1.1 and B1.3 singlemode fibre to meet the requirements of category I (industrial environments) as specified in EN 50173-1 and IEC 61753-1-3

I.S. EN 50516-3-1:2014

Incorporating amendments/corrigenda/National Annexes issued since publication:

The National Standards Authority of Ireland (NSAI) produces the following categories of formal documents:

I.S. xxx: Irish Standard — national specification based on the consensus of an expert panel and subject to public consultation.

S.R. xxx: Standard Recommendation — recommendation based on the consensus of an expert panel and subject to public consultation.

SWiFT xxx: A rapidly developed recommendatory document based on the consensus of the participants of an NSAI workshop.

This document replaces/revises/consolidates the NSAI adoption of the document(s) indicated on the CEN/CENELEC cover/Foreword and the following National document(s):

NOTE: The date of any NSAI previous adoption may not match the date of its original CEN/CENELEC document.

This document is based on:

EN 50516-3-1:2014

Published:

2014-06-06

*This document was published
under the authority of the NSAI
and comes into effect on:*

2014-06-24

ICS number:

33.180.20

NOTE: If blank see CEN/CENELEC cover page

NSAI
1 Swift Square,
Northwood, Santry
Dublin 9

T +353 1 807 3800
F +353 1 807 3838
E standards@nsai.ie
W NSAI.ie

Sales:
T +353 1 857 6730
F +353 1 857 6729
W standards.ie

Údarás um Chaighdeáin Náisiúnta na hÉireann

EUROPEAN STANDARD

EN 50516-3-1

NORME EUROPÉENNE

EUROPÄISCHE NORM

June 2014

ICS 33.180.20

English Version

Industrial connector sets and interconnect components to be used in optical fibre control and communication systems - Product specifications - Part 3-1: Type ODVA APC terminated on EN 60793-2-50 category B1.1 and B1.3 singlemode fibre to meet the requirements of category I (industrial environments) as specified in EN 50173-1 and IEC 61753-1-3

Industrie-Steckverbindersätze und Verbindungsbaulemente für Lichtwellenleiter-Steuerungs- und Datenübertragungssysteme - Produktnormen - Teil 3-1: Industriesteckverbinder der Bauart ODVA-APC zum Anschluss an Einmodenfasern der Typen B1.1 und B1.3 nach EN 60793-2-50 für die Kategorie I (Industrienumgebung) nach den Festlegungen in EN 50173-1 und IEC 61753-1-3

This European Standard was approved by CENELEC on 2013-12-23. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.



European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents

Foreword	4
1 Scope	7
1.1 Product definition	7
1.2 Intermateability	7
1.3 Operating environment	7
1.4 Reliability	7
1.5 Quality assurance	7
2 Normative references	8
3 Description	10
3.1 General	10
3.2 Plug	10
3.3 Adaptor	10
3.4 Materials	10
3.5 Dimensions	10
3.6 Colour and marking	11
4 Variants	11
4.1 Terminated plug	11
4.2 Adaptor	12
4.3 Identification of variants	12
5 Dimensional requirements	13
5.1 Outline dimensions	13
5.2 Mating face and other limit dimensions	17
6 Tests	26
6.1 Sample size	26
6.2 Test and measurement methods	27
6.3 Test sequence	27
6.4 Pass/fail criteria	27
7 Test report	27
8 Product qualification requirements	27
8.1 Dimensional and marking requirements	27
8.2 Optical performance requirements	28
8.3 Mechanical performance requirements	29
8.4 Environmental performance requirements	33
Annex A (informative) Attenuation against reference	36
A.1 Test details	36
A.2 Reference LF3 connector details	36
Annex B (normative) Sample size and product sourcing requirements	37
Annex C (informative) Details of environmental classification out of EN 50173-1 (MICE)	38
Annex D (informative) Details of sample construction	39
Annex E (informative) Patent statement concerning ODVA industrial connectors	40
Bibliography	42

Figures

Figure 1a — Outline dimensions — Plug.....	13
Figure 1b — Outline dimensions — Plug.....	14
Figure 2 — Outline dimensions — Fixed adaptor.....	15
Figure 3 — Cut out for fixed adaptor mounting Variant 01	16
Figure 4 — Cut out for fixed adaptor mounting Variant 02	16
Figure 5 — Plug mating face and other limit dimensions	17
Figure 5 — Plug mating face and other limit dimensions	18
Figure 6 — Variant B1 / C1 / C1-FSOC LF3 connector interface	19
Figure 6 — Variant B1 / C1 / C1-FSOC LF3 connector interface	20
Figure 7 — Ferrule endface geometry — After termination.....	20
Figure 8 — Positioning of fibre core	21
Figure 9 — Ferrule endface geometry — Allowable undercut.....	22
Figure 10 — Variant 01, fixed adaptor	23
Figure 11 — LF3 adaptor interface	24
Figure 11 — LF3 adaptor interface	25
Figure 12 — Pin gauge for adaptor	26
Figure D.1 — Example of test specimen for Tests 1 – 13.....	39
Figure D.2 — Example of test specimen for Tests 14 – 19.....	39

Tables

Table 1 — Ensured level of random attenuation	7
Table 2 — Preferred colour scheme.....	11
Table 3 — Terminated plug — Plug variants.....	11
Table 4 — Terminated plug — Adaptor variants	12
Table 5 — Identification of plug variants.....	12
Table 6 — Identification of adaptor variants	12
Table 7 — Geometrical parameters	21
Table 8 — Optical performance requirements.....	28
Table 9 — Mechanical performance requirements.....	29
Table 10 — Environmental performance requirements.....	33
Table A.1 — Attenuation measurement: Test details	36
Table B.1 — Sample size and product sourcing requirements	37
Table C.1 — Details of environmental classification out of EN 50173-1 (MICE).....	38

Foreword

This document (EN 50516-3-1:2014) has been prepared by CLC/TC 86BXA, "Fibre optic interconnect, passive and connectorised components".

The following dates are fixed:

- latest date by which this document has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2014-12-23
- latest date by which the national standards conflicting with this document have to be withdrawn (dow) 2016-12-23

EN 50516, *Industrial connector sets and interconnect components to be used in optical fibre control and communication systems — Product specifications*, is currently divided in the following parts:

- *Part 1-1: Type SC-RJ PC industrial terminated on EN 60793-2-10 category A1a and A1b multimode fibre to meet the requirements of category I (industrial environments) as specified in IEC/PAS 61753-1-3;*
- *Part 2-1: Type ODVA PC industrial terminated on EN 60793-2-10 category A1a and A1b multimode fibre to meet the requirements of category I (industrial environments) as specified in EN 50173-1 and IEC 61753-1-3;*
- *Part 3-1: Type ODVA APC terminated on EN 60793-2-50 category B1.1 and B1.3 singlemode fibre to meet the requirements of category I (industrial environments) as specified in EN 50173-1 and IEC 61753-1-3 [the present document].*


CENELEC draws attention to the fact that it is claimed that compliance with this document may involve the use of a patent concerning ODVA industrial connectors (see declaration in Annex E).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC [and/or CEN] shall not be held responsible for identifying any or all such patent rights.


Industrial connector sets and interconnect components to be used in optical fibre control and communication systems — Product specifications			
Part 3-1: Type ODVA APC terminated on EN 60793-2-50 category B1.1 and B1.3 singlemode fibre to meet the requirements of category I (industrial environments) as specified in EN 50173-1 and IEC 61753-1-3			
Description		Performance	
Coupling mechanism:	Twist and lock with sealing	Application:	For the use in category I (industrial environment)
Configuration:	Plug / adaptor / with one side of the configuration having a seal and a protective shell	Attenuation (random mate) factory terminated:	B: $\leq 0,12$ dB mean $\leq 0,25$ dB for > 97 % of measurements C: $\leq 0,25$ dB mean $\leq 0,50$ dB for > 97 % of measurements
Fibre category:	EN 60793-2-50 Type B1.1 and B1.3	Attenuation (random mate) FSOC:	C: $\leq 0,25$ dB mean $\leq 0,50$ dB for > 97 % of measurements
Cable type:	See Table 3	Return loss:	1: ≥ 60 dB (mated) ≥ 55 dB (unmated)
Related documents:			
EN 50173-1	Information technology — Generic cabling systems — Part 1: General requirements		
EN 50173-3	Information technology — Generic cabling systems — Part 3: Industrial premises		
EN 60529	Degrees of protection provided by enclosures (IP Code) (IEC 60529)		
EN 60794-3	Optical fibre cables — Part 3: Sectional specification — Outdoor cables (IEC 60794-3)		
EN 61300 series	Fibre optic interconnecting devices and passive components — Basic test and measurement procedures (IEC 61300 series)		
EN 61753-1	Fibre optic interconnecting devices and passive components performance standard — Part 1: General and guidance for performance standards (IEC 61753-1)		
FprEN 61753-1-3 ¹⁾	Fibre optic interconnecting devices and passive components — Performance standard — Part 1-3: General and guidance for single-mode fibre optic connector and cable assembly for harsh industrial environment, Category I (IEC 61753-1-3:201X (86B/3496/CDV))		
EN 61754-28	Fibre optic interconnecting devices and passive components — Fibre optic connector interfaces — Part 28: Type LF3 connector family (IEC 61754-28)		

1) At draft stage.

Outline and maximum dimensions: ODVA connector plug with protective shell in sealed adaptor.

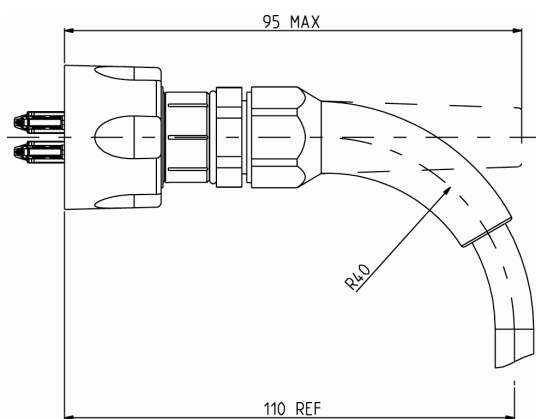

factory terminated

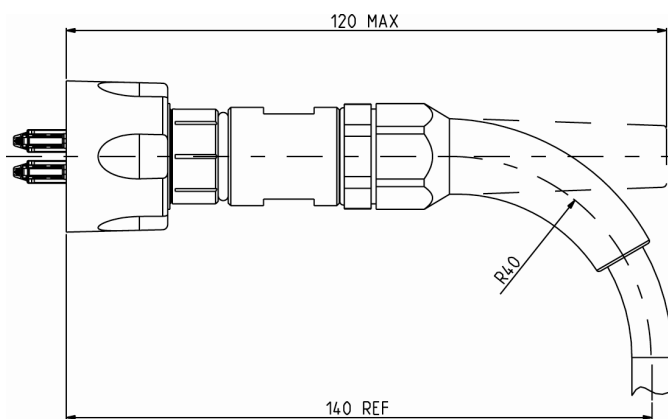

FSOC

1 Scope

1.1 Product definition

This European Standard contains the initial, start of life dimensional, optical, mechanical and environmental performance requirements which an ODVA (factory terminated) (Open DeviceNet Vendors Association) or ODVA fusion splice on connector (FSOC) terminated with cylindrical composite titanium APC ferrules with one side protected by an industrial housing, an adaptor fitted with resilient alignment sleeve and patchcord shall meet in order for it to be categorised as an EN standard product. The product is rated IP67.

Since different variants are permitted, product marking details are given in 3.6.

1.2 Intermateability

Products conforming to the requirements of this specification will inter mate and give the specified level of random attenuation and random return loss performance provided the same fibre type is used. The intention is that this will be true irrespective of the manufacturing source(s) of the product.

When intermating plug variants with different attenuation grades, the resulting level of attenuation cannot be assured to be any better than the worst attenuation grade.

The intermating of a grade C plug with a grade B plug will result in an uncertain level of random attenuation performance.

Table 1 — Ensured level of random attenuation

Plug variant/Attenuation grade	C	B
C	C	C
B	C	B

1.3 Operating environment

The tests selected combined with the severities and durations, specified as Category I, are intended to reflect, although they do not necessarily satisfy all the requirements of, the boundary conditions of M₃I₃C₃E₃.

1.4 Reliability

Whilst the anticipated service life expectancy of the product in this environment is 20 years, compliance with this specification does not guarantee the reliability of the product. This should be predicted using a recognised reliability assessment programme.

1.5 Quality assurance

Compliance with this specification does not guarantee the manufacturing consistency of the product. This should be maintained using a recognised quality assurance programme.

This is a free preview. Purchase the entire publication at the link below:

[Product Page](#)

-
- Looking for additional Standards? Visit Intertek Inform Infostore
 - Learn about LexConnect, All Jurisdictions, Standards referenced in Australian legislation
-