



National Standards Authority of Ireland  
Údarás um Chaighdeáin Náisiúnta na hÉireann

IRISH STANDARD

**I.S. EN 1125:2008**

ICS 91.190

**BUILDING HARDWARE - PANIC EXIT  
DEVICES OPERATED BY A HORIZONTAL  
BAR, FOR USE ON ESCAPE ROUTES -  
REQUIREMENTS AND TEST METHODS**

National Standards  
Authority of Ireland  
Glasnevin, Dublin 9  
Ireland

Tel: +353 1 807 3800  
Fax: +353 1 807 3838  
<http://www.nsai.ie>

**Sales**

<http://www.standards.ie>

*This Irish Standard was  
published under the authority  
of the National Standards  
Authority of Ireland and  
comes into effect on:  
4 April 2008*

**NO COPYING WITHOUT NSAI  
PERMISSION EXCEPT AS  
PERMITTED BY COPYRIGHT  
LAW**

© NSAI 2008

**Price Code Q**

Údarás um Chaighdeáin Náisiúnta na hÉireann

*This page is intentionally left BLANK.*

**I.S. EN 1125:2008**

**EUROPEAN STANDARD**

**EN 1125**

**NORME EUROPÉENNE**

**EUROPÄISCHE NORM**

January 2008

ICS 91.190

Supersedes EN 1125:1997

English Version

## Building hardware - Panic exit devices operated by a horizontal bar, for use on escape routes - Requirements and test methods

Quincaillerie pour le bâtiment - Fermetures anti-panique manœuvrées par une barre horizontale, destinées à être utilisées sur des voies d'évacuation - Exigences et méthodes d'essai

Schlösser und Baubeschläge - Paniktürverschlüsse mit horizontaler Betätigungsstange, für Türen in Fluchtwegen - Anforderungen und Prüfverfahren

This European Standard was approved by CEN on 30 November 2007.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION  
COMITÉ EUROPÉEN DE NORMALISATION  
EUROPÄISCHES KOMITEE FÜR NORMUNG

**Management Centre: rue de Stassart, 36 B-1050 Brussels**

## Contents

Page

Foreword.....	4
Introduction .....	5
1 Scope .....	7
2 Normative references .....	7
3 Terms and definitions.....	7
4 Requirements .....	12
4.1 Design requirements .....	12
4.2 Performance requirements .....	20
4.3 Requirements for product information .....	25
5 Tests - General and test apparatus .....	26
5.1 General.....	26
5.2 Test apparatus .....	27
6 Test methods – Procedures.....	28
6.1 General.....	28
6.2 Test procedure - Test sample A – Environmental tests.....	29
6.3 Test procedure - Test sample B - Design and performance tests .....	31
7 Classification.....	36
7.1 Category of use (1st character) .....	36
7.2 Durability (2nd character) .....	36
7.3 Door mass (3rd character) .....	36
7.4 Suitability for use on fire/smoke doors (4th character) .....	36
7.5 Safety (5th character) .....	36
7.6 Corrosion resistance (6th character).....	36
7.7 Security (7th character).....	37
7.8 Projection of horizontal bar (8th character).....	37
7.9 Type of horizontal bar operation (9th character).....	37
7.10 Field of door application (10th character) .....	37
7.11 Example of classification .....	37
8 Marking .....	38
8.1 On the product .....	38
8.2 On the packaging.....	38
8.3 On the installation instructions .....	39
8.4 Mortise lock combined with a separate horizontal bar unit .....	39
9 Evaluation of Conformity .....	39

<b>9.1</b>	<b>Initial type test .....</b>	<b>39</b>
<b>9.2</b>	<b>Sampling, testing and conformity criteria .....</b>	<b>40</b>
<b>9.3</b>	<b>Factory production control .....</b>	<b>41</b>
<b>9.4</b>	<b>Periodic testing (for all products) .....</b>	<b>45</b>
<b>9.5</b>	<b>Annual testing (for all products) .....</b>	<b>46</b>
<b>Annex A (normative)</b>	<b>Installation and fixing instructions .....</b>	<b>47</b>
<b>Annex B (normative)</b>	<b>Additional requirements for panic exit devices intended for use on fire/smoke resisting door assemblies.....</b>	<b>49</b>
<b>Annex C (normative)</b>	<b>Maintenance instructions .....</b>	<b>50</b>
<b>Annex D (normative)</b>	<b>Flow chart of test procedures .....</b>	<b>51</b>
<b>Annex E (informative)</b>	<b>Guidance for choosing relevant product standards for particular exit door applications .....</b>	<b>52</b>
<b>Annex ZA (informative)</b>	<b>Relationship between this European Standard and the Essential Requirements of EU Directive 89/106/EEC, EU Construction Products Directive .....</b>	<b>53</b>
<b>Bibliography</b>	<b>.....</b>	<b>58</b>

## **Foreword**

This document (EN 1125:2008) has been prepared by Technical Committee CEN/TC 33 “Doors, windows, shutters, building hardware and curtain walling”, the secretariat of which is held by AFNOR.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by July 2008, and conflicting national standards shall be withdrawn at the latest by July 2008.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document supersedes EN 1125:1997.

This document has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association, and supports essential requirements of EU Directive(s).

For relationship with EU Directive 89/106/EEC, see informative Annex ZA which is an integral part of this document.

It has been revised to incorporate clarification of the definitions, safety requirements and test procedures, in particular for panic exit devices intended for use on double leaf doorsets, in order to allow for more reproducible test methods.

It incorporates extension of the classification to avoid misuse of the products, extension of the limits of door mass and dimensions as well as extension of the field of door application to cover products already available on the market which were not covered by the 1997 edition of this European Standard.

A full contribution to the preparation of this European Standard has been made by The European Federation of Associations of Lock and Builders Hardware Manufacturers (ARGE).

This European Standard is part of a group of standards dedicated to building hardware products. It is one of a group of standards for exit devices and exit systems developed by Technical Committee CEN/TC 33.

Wherever reference is made to classes, they are considered to be technical classes and not classes according to Article 3(2) of the Construction Products Directive (89/106/EEC).

Verification or tests performed by mechanical test laboratory and fire test laboratory are listed in Table 1 summarizing performance characteristics and compliance criteria.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

## Introduction

Experience relating to escape from buildings, fire and/or smoke hazards and general safety has made it desirable that doors, in public areas, public buildings, places of public entertainment, shops etc, or those that have to be operated in a panic situation, be fitted with panic exit devices operated by a horizontal bar to common European Standard specifications.

The main purpose of the performance requirements contained in this European Standard is to give safe and effective escape through a doorway with one single operation by hand and/or body pressure to release the panic exit device, with minimum effort and without prior knowledge of the panic exit device.

In this standard priority is given to the panic operation rather than pressure and resistance to the door opening from seals, weather-stripping, multiple bolt heads etc. Precedence is given to the importance of ease of opening by the young, elderly and infirm.

In a panic situation, a group of people will react differently from an individual. When two or more people are rushing to an exit door located on an escape route, probably in darkness and/or smoke, it is possible that the first one to reach the door will not necessarily operate the panic exit device, but can push the surface of the door (door under pressure) while other people will be trying to operate the horizontal bar by hand or body pressure. See Figure 1.

Whilst reasonable external security will be provided by the panic exit devices covered in this standard to avoid potential misuse of the device (chains, bolts, etc.), the main objective is to enable a door to be opened at all times by hand or body pressure along its inside face on the panic exit device and not requiring the use of a key or any other object.

The performance tests incorporated in this European Standard are considered to be reproducible and, as such, will provide a consistent and objective assessment of the performance of these panic exit devices.

Where emergency exit devices are required for situations in which people are familiar with the use of the door hardware in their surroundings, where exit doors are required to be inwardly-opening, and/or where a panic situation is unlikely to develop, reference can be made to EN 179, covering emergency exit devices. See definition **3.19**.

Where additional security is required for exit doors, reference should be made to prEN 13633 covering electrically controlled panic exit systems, or to prEN 13637 covering electrically controlled exit systems, for use on escape routes. See Bibliography.

Due to the wide range of panic exit devices, the reader is advised to refer to the scope and the detailed contents of this European Standard for coverage but, for information and general guide, this revised European Standard now deals with:

- panic exit devices designed to be used in panic situations;
- panic exit devices for use on hinged or pivoted door leaves only;
- range of panic exit devices including those for use on double doorsets (see **7.10**);
- two specific types of horizontal bar operation: panic exit devices with "push-bar", type A (see **3.17** and Figure 2) and panic exit devices with "touch-bar", type B (see **3.19** and Figure 3);
- two categories of panic exit device projection in order to maximize the width of the escape route, and minimize the projection from the door face where either or both of these criteria are of importance (see **4.1.11**);
- two specific designs of panic exit devices: those designed for use on single leaf doors only, and those specifically designed for use on single leaf doors and/or double doorsets.

This European Standard does not cover the following:

- any particular design of panic exit devices, and only such dimensions as are required for safety reasons are specified;
- specific panic exit devices intended for use by the severely disabled (due to the wide range of disabilities, such panic exit devices and their performances should be agreed between specifier and producer);
- emergency exit devices operated by a lever handle or push-pad (see EN 179) or electrically controlled panic exit systems or electrically controlled exit systems (see prEN 13633 and prEN 13637).



**Figure 1 — A panic situation**



## 1 Scope

This European Standard specifies requirements for the manufacture, performance and testing of panic exit devices mechanically operated by either a horizontal push-bar or a horizontal touch-bar, specifically designed for use in a panic situation on escape routes.

The suitability of a panic exit device for use on fire/smoke resisting door assemblies is determined by fire performance tests conducted in addition to the performance tests required by this European Standard. Annex B indicates additional requirements for these products.

This European Standard covers panic exit devices which are either manufactured and placed on the market in their entirety by one producer or produced by more than one producer and subsequently placed on the market as a kit in a single transaction.

## 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 179, *Building hardware - Emergency exit devices operated by a lever handle or push pad - Requirements and test methods*

EN 1634-1, *Fire resistance and smoke control tests for door and shutter assemblies, openable windows and elements of building hardware - Part 1: Fire resistance test for doors and shutter assemblies and openable windows*

EN 1634-3, *Fire resistance and smoke control tests for door and shutter assemblies, openable windows and elements of building hardware - Part 3: Smoke control test for door and shutter assemblies*

EN 1670:2007, *Building hardware - Corrosion resistance - Requirements and test methods*

EN ISO 9001:2000, *Quality management systems - Requirements (ISO 9001:2000)*

## 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

### 3.1

#### **active leaf**

first opening and last closing leaf of a rebated single swing double doorset

### 3.2

#### **automatic relatching device**

part of a panic exit device to enable the automatic securing of a door in the closed position, after it has been operated

NOTE For example, a spring loaded latch bolt or an automatically thrown bolt head.

## I.S. EN 1125:2008

### EN 1125:2008 (E)

#### 3.3

##### **bolt head**

portion of a panic exit device that engages with the keeper to secure the door in the closed position

#### 3.4

##### **dogging mechanism**

part of a panic exit device for holding the bolt head(s) in the withdrawn position until manually reset

#### 3.5

##### **doorset**

assembly consisting of a single leaf exit door being hinged or pivoted vertically in a frame

#### 3.6

##### **inactive leaf**

last opening and first closing leaf of a rebated single swing double doorset

#### 3.7

##### **inside**

face of the door on which the bar is situated for operating a panic exit device in order to exit

#### 3.8

##### **keeper**

part of a panic exit device such as a strike, a socket or other fitting with which the bolt head(s) engages

#### 3.9

##### **push-bar**

activating horizontal bar of a panic exit device (type A), designed to be fixed between pivoted support brackets that operates in the direction of exit and/or in an arc downwards (See Figure 2)

#### 3.10

##### **producer**

manufacturer, entity or organization that has legal responsibility for placing the product on the market

#### 3.11

##### **outside**

face of the door opposite to the face on which the bar for operating the panic exit device is situated

#### 3.12

##### **outside access device**

optional part of a panic exit device for opening an exit device from the outside

NOTE An outside access device can be supplied with optional re-entry function.

#### 3.13

##### **bar**

horizontal part of a panic exit device which, when pushed, will operate the mechanism

#### 3.14

##### **double doorset**

assembly consisting of two hinged or pivoted leaves within a single frame

NOTE 1 The meeting stiles can be either plain or rebated.

NOTE 2 A double doorset where only one leaf is equipped with a panic exit device is considered to be a single panic exit doorset.

NOTE 3 A double doorset where the first opening leaf is equipped with a panic exit device conforming to EN 1125 and the second opening leaf is equipped with an emergency exit device conforming to EN 179 is considered to be a double emergency exit doorset, or a single panic exit door.

**3.15****touch-bar**

activating horizontal bar of a panic exit device (type B), designed to be part of a chassis or other mounting assembly, that operates in the direction of exit (see Figure 3)

**3.16****release force**

force applied to the bar in a direction perpendicular to the door face, which is necessary to withdraw or release all the bolt head(s) from the keeper(s), such that the door can be opened

**3.17****vertical rod**

extension of the bolt head of a panic exit device that links it to the horizontal bar via the operating mechanism


**3.18****panic exit device**

exit device conforming to EN 1125 intended to give safe and effective escape through a doorway with minimum effort and without prior knowledge of the panic exit device allowing safe escape even in the event of the door being under pressure such as by people being pushed against the door in the direction of escape

**NOTE 1** A panic exit device contains bolt head(s) that engage(s) with a keeper(s) in the surrounding door frame and/or floor for securing a door when closed. The bolt head(s) can be released by the bar positioned horizontally across the inside face of the door when it is moved anywhere along its effective length in the direction of travel and/or in an arc downwards.

**NOTE 2** Panic exit devices are intended for use where panic situations can arise. In a panic situation, a group of people will react differently from an individual. When two or more people are rushing to an escape door, probably in darkness and/or smoke, it is possible that the first one to reach the door will not necessarily operate the panic exit device, but can push the surface of the door (door under pressure) while other people will be trying to operate the horizontal bar by hand or body pressure.

**NOTE 3** When a door opens in the direction of exit, a panic exit device can be used instead of an emergency exit device subject to local regulations.

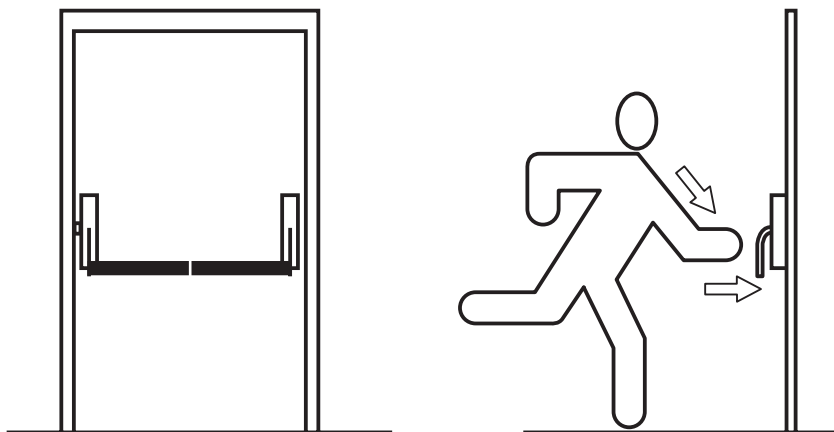

**Figure 2 — Panic exit device with type A bar operation (push-bar)**

This is a free preview. Purchase the entire publication at the link below:

[Product Page](#)

- 
- Looking for additional Standards? Visit Intertek Inform Infostore
  - Learn about LexConnect, All Jurisdictions, Standards referenced in Australian legislation
-